



CARATTERISTICHE:

I ventilatori in linea da canale CKM sono progettati e costruiti per un inserimento rapido e sicuro nei tratti di condotto rettangolare.

I ventilatori sono provvisti di girante in acciaio zincato a semplice aspirazione con motore elettrico direttamente accoppiato raffreddato dal fluido convogliato. Le ventole sono alloggiare in una cassa in acciaio zincato provvista di flange per il fissaggio ai condotti.

Il gruppo ventilante è montato su di una portello a battente in grado di assicurare una manutenzione rapida e la completa sanificabilità del ventilatore.

CHARACTERISTICS:

In-line duct fans CKM are designed and built for rapid and secure insertion in rectangular ducts. The fans are equipped with galvanized steel impeller single inlet with motor connected directly cooled by air flow. The fans are housed in a box made of galvanized steel with flange for fixing to the ducts.

The motorized impeller is mounted on a hinged door that ensure easy maintenance and complete sanitization of the fan.

TABELLA TECNICA DATI GENERALI - PREZZI - GENERAL TECHNICAL DATA TABLE - PRICES

■ STOCK

| MODELLO MODEL | TENSIONE - VOLTAGE | FREQUENZA FREQUENCY | POTENZA - POWER | CLASSE ISOLAMENTO INSULATION CLASS | CORRENTE - CURRENT | REGOLATORE CONTROL | VELOCITÀ SPEED | |
|----------------------|--------------------|------------------------|-----------------|---------------------------------------|--------------------|-----------------------|-------------------|---|
| | V | Hz | W | class | A | | RPM | € |
| CKM 30 - 15 | 230 | 50 | 90 | IP 55 | 0,4 | RC2A | 2630 | |
| CKM 40 - 20 A | 230 | 50 | 104 | IP 55 | 0,47 | RC2A | 2645 | |
| CKM 40 - 20 B | 230 | 50 | 130 | IP 55 | 0,58 | RC2A | 2675 | |
| CKM 50 - 25 | 230 | 50 | 180 | IP 55 | 0,8 | RC2A | 2635 | |
| CKM 60 - 30 | 230 | 50 | 147 | IP 55 | 0,66 | RC2A | 1440 | |
| CKM 60 - 35 A | 230 | 50 | 340 | IP 55 | 0,64 | RC2A | 1440 | |
| CKM 60 - 35 B | 230 | 50 | 380 | IP 55 | 0,96 | RC2A | 1420 | |
| CKM 70 - 40 A | 230 | 50 | 620 | IP 55 | 2,06 | RC5A | 1430 | |
| CKM 70 - 40 B | 230 | 50 | 690 | IP 55 | 3 | RC5A | 1435 | |
| CKM 80 - 50 | 400 | 50 | 1080 | IP 55 | 2,5 | - | 1350 | |
| CKM 100 - 50 | 400 | 50 | 1670 | IP 55 | 3 | - | 1350 | |

| MODELLO MODEL | € |
|------------------|---|
| RC2A | |
| RC5A | |



DISEGNI - DRAWINGS













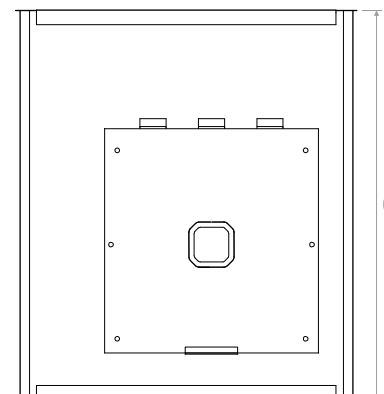


TABELLA DIMENSIONI - DIMENSIONAL TABLE

| Modello - Model | A | B | C | D | E | F | G |
|----------------------|-----|------|------|------|-----|------|-----|
| CKM 30 - 15 | 150 | 300 | 400 | 320 | 170 | 350 | 200 |
| CKM 40 - 20 A | 200 | 400 | 500 | 420 | 220 | 450 | 250 |
| CKM 40 - 20 B | 200 | 400 | 500 | 420 | 220 | 450 | 250 |
| CKM 50 - 25 | 250 | 500 | 565 | 520 | 270 | 550 | 300 |
| CKM 60 - 30 | 300 | 600 | 650 | 620 | 320 | 650 | 350 |
| CKM 60 - 35 A | 350 | 600 | 760 | 620 | 370 | 650 | 400 |
| CKM 60 - 35 B | 350 | 600 | 760 | 620 | 370 | 650 | 400 |
| CKM 70 - 40 A | 400 | 700 | 800 | 720 | 420 | 750 | 450 |
| CKM 70 - 40 B | 400 | 700 | 800 | 720 | 420 | 750 | 450 |
| CKM 80 - 50 | 500 | 800 | 920 | 820 | 520 | 850 | 560 |
| CKM 100 - 50 | 500 | 1000 | 1050 | 1030 | 530 | 1060 | 560 |

TABELLA PRESTAZIONI - PERFORMANCE TABLE

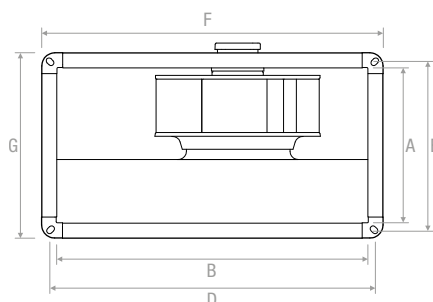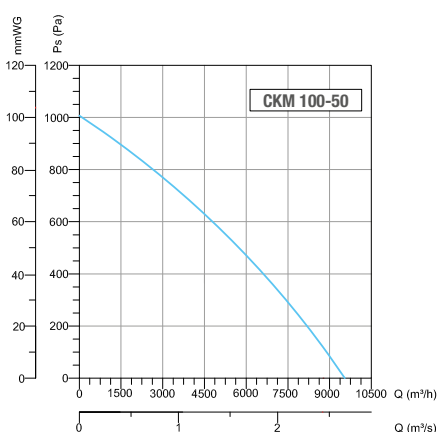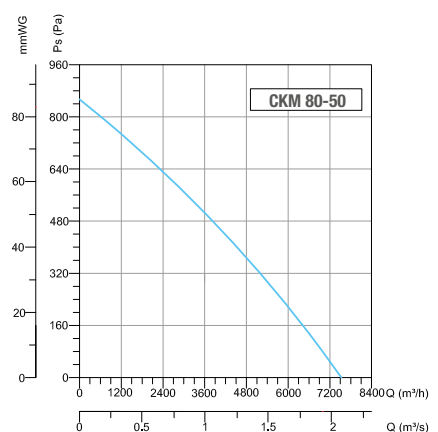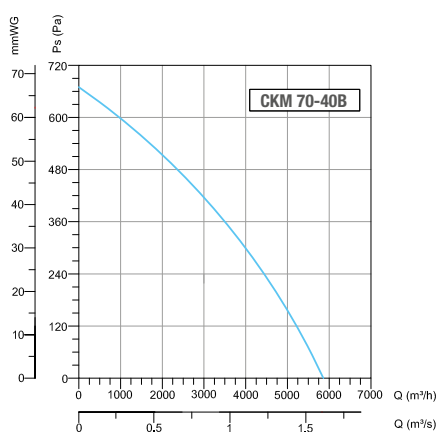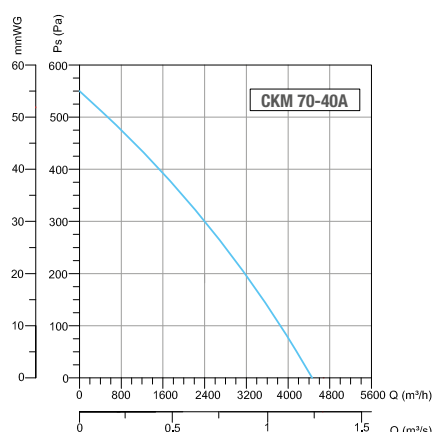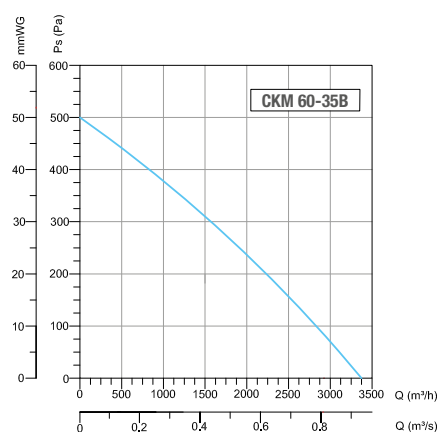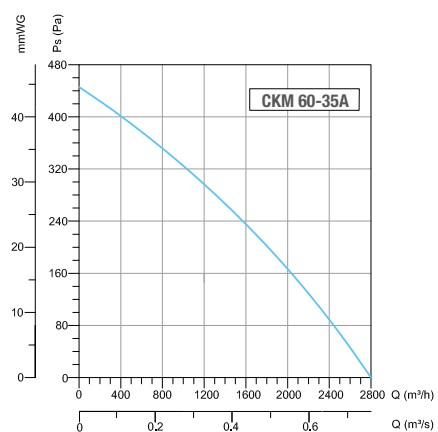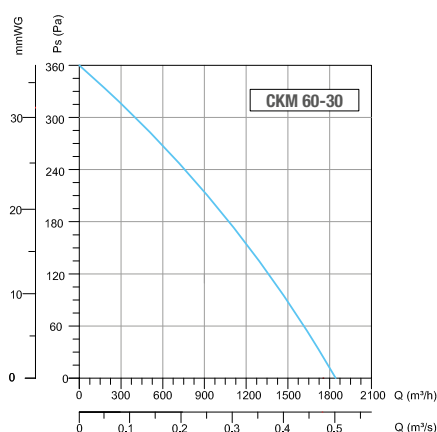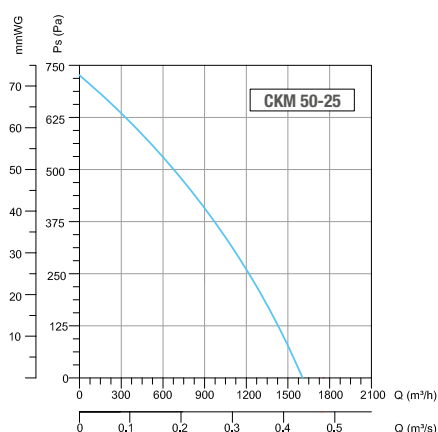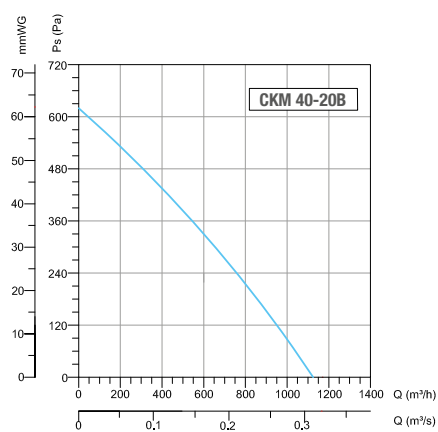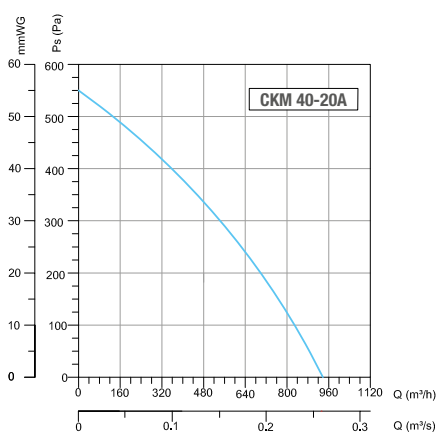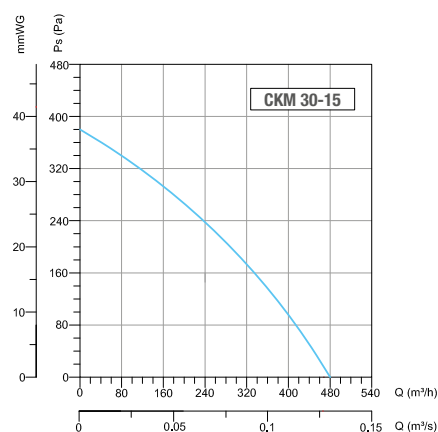

VEN