

PREZZI - PRICES

STOCK




BxH	GMAI60	GMAI60P	SC	PDZ1	PDZ11	PDZ2	PDZ12
mm	€	€	€	€	€	€	€
595x595							

VERNICIATURA - PAINTING:





Colori RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%

Altri colori: prezzi a richiesta - Different colors: prices on request

DISEGNI - DRAWINGS

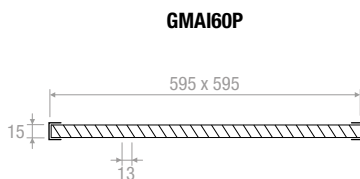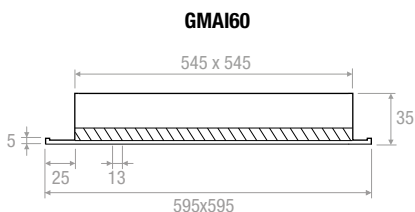

GMAI



Plenum isolato esternamente spessore 6 mm
Plenum externally insulated thickness 6 mm

DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM


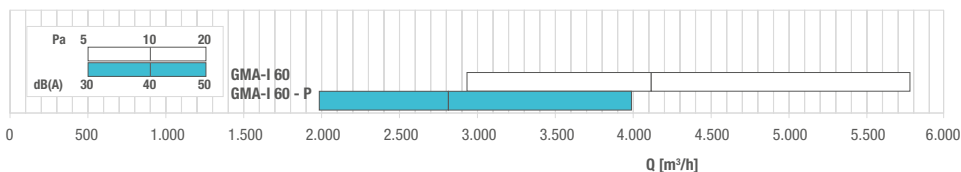


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A_k [m²]	Q [m³/h]		L_{wa} [dB(A)]		Dp_i [Pa]	
		min	max	min	max	min	max
GMAI60 GMAI60P	0,2375	2640	5210	41	60	5	20

GMAI60



GRI

CARATTERISTICHE:

Griglie a maglia quadra 13x13 mm, inclinata di 45° per controsoffitto dim. 595x595 esterno cornice.

COSTRUZIONE:

Alluminio anodizzato.

IMPIEGO:

A controsoffitto, in ripresa.

FISSAGGIO:

Fissaggio con clips o su richiesta con viti frontali.

ACCESSORI:

- Plenum in acciaio zincato standard e isolato.
- Serranda di taratura in acciaio zincato con alette a movimento contrapposto.

CHARACTERISTICS:

Eff crate grilles 13x13 mm pitch, inclined of 45° for false ceilings 595x595 overall size.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For false ceilings installation and for air intake.

FIXING:

Fixing by using clips or frontal screws on demand.

ACCESSORIES:

- Galvanized steel plenum, standard or insulated.
- Calibration damper made of galvanized steel and fins with opposite movement.

