


# GMAI60SMF



GMAI

## PREZZI - PRICES

STOCK

	CON FILTRO WITH FILTER							
BxH	GMAI60SMF	GMAI60SM	FILTRO - FILTER	SC	PDZ1	PDZ11	PDZ2	PDZ1 2
mm	€	€	€	€	€	€	€	€
595x595								

## VERNICIATURA - PAINTING:

Colori RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%  
Altri colori: prezzi a richiesta - Different colors: prices on request

## DESCRIZIONI - DESCRIPTIONS:

**GMAI60SMF:** Griglia a maglia quadra 13x13 mm, inclinata di 45°, smontabile, dimensione 595x595 mm esterno cornice, con filtro incluso - Egg crate grille 13x13 mm pitch inclined 45° with removable core, 595x595 overall size, with filter

**GMAI60SM:** Griglia a maglia quadra 13x13 mm, inclinata di 45°, smontabile, dimensione 595x595 mm esterno cornice, senza filtro - Egg crate grille 13x13 mm pitch inclined 45° with removable core, 595x595 overall size, without filter

## CARATTERISTICHE:

Griglie a maglia quadra 13x13 mm, inclinata di 45° smontabile per controsoffitto dim. 595x595 esterno cornice.

## COSTRUZIONE:

Alluminio anodizzato.

## IMPIEGO:

A controsoffitto, in ripresa.

## FISSAGGIO:

Fissaggio con clips o su richiesta con viti frontali.

## ACCESSORI:

- Plenum in acciaio zincato standard e isolato.
- Serranda di taratura in acciaio zincato con alette a movimento contrapposto.

## CHARACTERISTICS:

Egg crate grilles 13x13 mm pitch, inclined of 45° with removable core, for false ceilings 595x595 overall size.

## CONSTRUCTION:

Anodized aluminium.

## UTILIZATION:

For false ceilings installation and for air intake.



## FIXING:

Fixing by using clips or frontal screws on demand.


## ACCESSORIES:

- Galvanized steel plenum, standard or insulated.
- Calibration damper made of galvanized steel and fins with opposite movement.

## DISEGNI - DRAWINGS

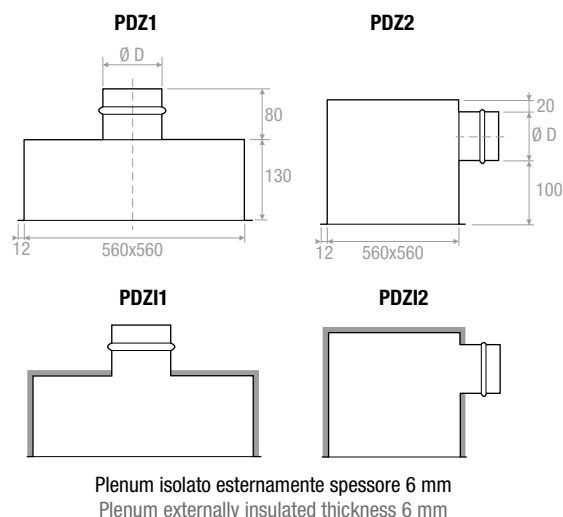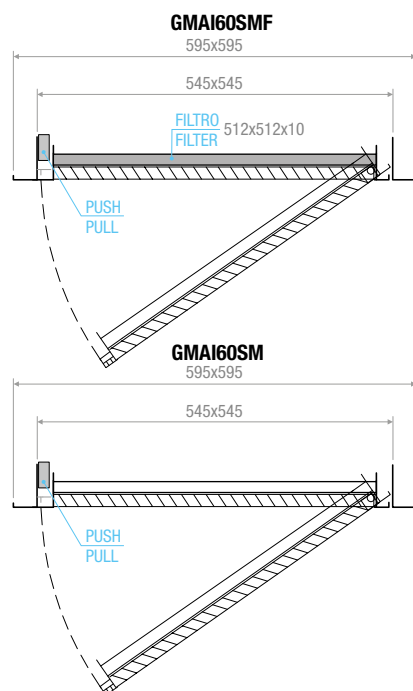

## DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM

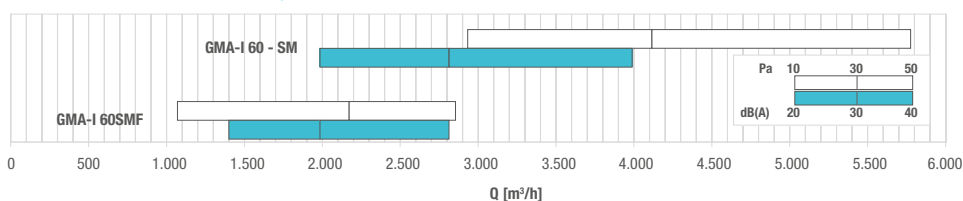

## TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A <sub>k</sub> [m²]	Q [m³/h]		L <sub>WA</sub> [dB(A)]		Dp <sub>i</sub> [Pa]	
		min	max	min	max	min	max
GMAI60SM	0,2375	2640	5210	41	60	5	20
GMAI60SMF	0,2375	1070	2860	-	43	10	50

